



SECURIGUARD™

Concealed Cylinder Resists Vandalism, Bumping & Unauthorized Key Use

Designed To Fit Over Removable Core or Standard Cylinders



What is "Bumping"?

Burglars take a regular key and mill it down, creating a "Bump Key". It is inserted into the lock and with a tap of a hammer on the "Bump Key" the lock opens. It's so easy an eight-year-old can do it!


The technique has been around for over 20 years and is spreading like wildfire thanks to the internet.

SECURIGUARD™ Protects Against


- Bumping
- Unauthorized Key Use
- Vandalism
 - Picking
 - Wrenching
 - Crazy Glue

SECURIGUARD™ Offers

- Bump Key Protection
- Simple Access Control
- 100% Cylinder Concealment
- Prevention Of Cylinder Icing
- Easy Installation
- Special Magnetic Keys That Cannot Be Duplicated
- Ease Of Use

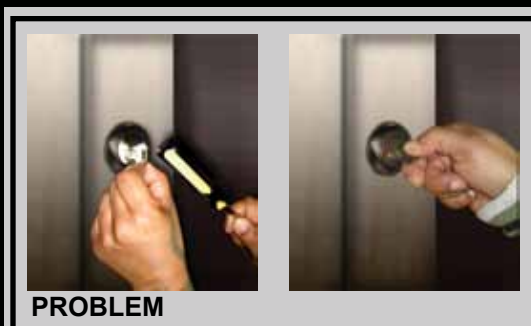

PROBLEM



SOLUTION



MODEL #6300


Size
 Height: 5 3/4"
 Width: 2"
 Depth: 1 3/8"
 Finish: Clear Aluminum
 Furnished with 2
 Magnetic Keys

SECURIGUARD™ Stops Crazy Glue & Bump Keys

Securiguard™ has a sliding shield that covers the cylinder. Prevents vandalism by Crazy Glue and "Bump Keys" cannot be used.

The shield is raised and lowered via a special magnetic key.

When the shield is up, the key can be used. When the shield is down, the cylinder is 100% concealed.

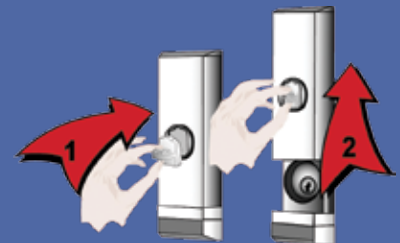

SECURIGUARD™ Key Info

There are millions of Securiguard™ key combinations. Additional keys can be ordered and Securiguard™ can be ordered to work with the same magnetic key. Regular magnets cannot open the Securiguard™.



SECURIGUARD™ Model Builder


54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

MODELS	6300	Use Over Standard Or High-Security Cylinders. Furnished With 2 Magnetic Keys.	
	6302	For Use With "Schlage" Deadbolts. Includes Modified Filler Plate & Collar.	
	6305	Combination Of 6300 & BAP. For Use With "Best" Or Other Raised Face Removable Core Cylinders.	
	6310	Identical To 6300, Furnished With 3 Magnetic Keys Per Securiguard	
	6315	Identical To 6305, Furnished With 3 Magnetic Keys Per Securiguard	
	63PP	Securiguard Is Mounted On A Stainless Steel Pull Plate For Use With Exit Device. Contact Factory With Specific Exit Device Name & Model Number For Custom Model.	
	63MP	Securiguard Is Mounted On A Stainless Steel Plate For Use With Exit Device Or Other Lock. Contact Factory With Specific Exit Device Name & Model Number For Custom Model.	
	64	Change "63" To "64" For A Securigaurd With Removable Bay	<input type="checkbox"/>
PARTS & OPTIONS	63BAP	Adapter Plate (Spacer) For Use With Raised Face I/C Cylinders	
	63KEY	Additional Key	
	63BAY	Replacement Locking Bay With 2 Keys	<input type="checkbox"/>
FINISH	AL	Aluminum	
	JB	Jet Black	<input type="checkbox"/>

OPERATION:

The SECURIGUARD™ shield is raised by the magnetic key. The lock key may then be inserted and used.

The shield will remain open until lowered by use of the magnetic key.



KEY LOCK-OUT FUNCTION:

This function is used to lock-out keys and restrict access to the cylinder, in addition to cylinder protection.

Typically, a manager will raise the shield at the start of the day. Regular keys can then be used to operate the lock. At the end of the day, the manager uses the magnetic key to lower the shield.

KEY COMBINATIONS:

SECURIGUARD™ is available keyed different or keyed alike to a new or existing combination.

AVAILABLE FINISHES:

JB = Jet Black Finish.

AL = Aluminum Finish (clear).

ADDITIONAL KEYS:

SECURIGUARD™ keys can be ordered from the factory to match code numbers.

Keys are stamped with code numbers. Codes may be registered to prevent ordering by unauthorized individuals.



NOTE: SPECIAL CYLINDER CAPS:

Some cylinders use special caps over the face of the cylinder for different finishes. Certain caps add too much to the diameter of the cylinder and need to be removed prior to insertion in the Securiguard. This does not affect the cylinder operation.

APPLICATIONS:

- Areas where cylinders are prone to vandalism
- Areas where cylinders are prone to weather issues
- Doors where dual verification for entry is needed
- Doors needing restricted access

POPULAR MODELS:

- 6300-AL Standard unit with two keys; aluminum
- 6300-JB Standard unit with two keys; jet black
- 6305-AL Standard unit with adapter plate for use with "Best" or other raised face removable core cylinders; aluminum
- 6305-JB Standard unit with adapter plate for use with "Best" or other raised face removable core cylinders; jet black